US008632017B2

(12) **United States Patent**
Kucera et al.

(10) **Patent No.: US 8,632,017 B2**
(45) **Date of Patent: *Jan. 21, 2014**

(54) **DAMPER CONTROL SYSTEM**

(71) Applicant: **Honeywell International Inc.**, Morristown, NJ (US)

(72) Inventors: **David Kucera**, Morristown, NJ (US); **Shanna L. Leeland**, Duvall, WA (US); **Peter M. Anderson**, St. Paul, MN (US)

(73) Assignee: **Honeywell International Inc.**, Morristown, NJ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/662,089**

(22) Filed: **Oct. 26, 2012**

(65) **Prior Publication Data**

US 2013/0048743 A1 Feb. 28, 2013

Related U.S. Application Data

(63) Continuation of application No. 12/553,795, filed on Sep. 3, 2009, now Pat. No. 8,297,524.

(51) **Int. Cl.**
F23L 13/02 (2006.01)
F23N 3/00 (2006.01)

(52) **U.S. Cl.**
USPC ..... **236/1 G**; 431/20; 700/302

(58) **Field of Classification Search**
USPC ..... 236/1 G, 15 BD, 26 A; 431/20; 126/285 R; 700/302
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,708,737	A	1/1973	Johnson
3,818,297	A	6/1974	Ha et al.
3,847,350	A	11/1974	Thompson
3,849,350	A	11/1974	Matsko
4,204,833	A	5/1980	Kmetz et al.
4,256,257	A	3/1981	Pinkerton
4,267,965	A	5/1981	Everett
4,299,554	A	11/1981	Williams
4,324,944	A	4/1982	Weihrich et al.
RE30,936	E	5/1982	Kmetz et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP	0356609	3/1990
GB	2211331	6/1989

OTHER PUBLICATIONS

Honeywell D896 Automatic Vent Damper, Product Data, 12 pages, 1997.

(Continued)

Primary Examiner — Marc Norman
(74) *Attorney, Agent, or Firm* — Seager Tufte & Wickhem LLC.

(57) **ABSTRACT**

A damper control system having energy efficient mechanisms. The system may use a heat-to-electric power converter such as a thermopile. Heat may come from a pilot light used for igniting a flame for an appliance. The system may store electric energy in a storage module which could be a sufficiently large capacitor. The system may monitor the position of a damper in a vent or the like and provide start and stop movements of the damper using minimal energy. One way that the system may control electrical energy to a damper motor or another electrical mover of the damper is to use pulse width modulated signals.

23 Claims, 8 Drawing Sheets

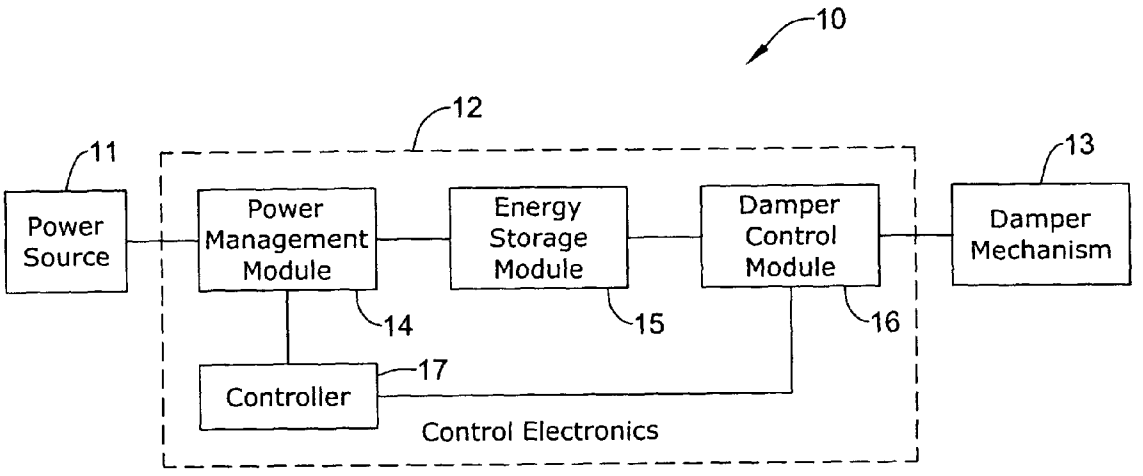

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,333,002	A	6/1982	Kozak
4,390,123	A	6/1983	McCabe
4,460,329	A	7/1984	Trent
4,508,261	A	4/1985	Blank
4,511,790	A	4/1985	Kozak
4,538,980	A	9/1985	Hoyme
4,588,875	A	5/1986	Kozak et al.
4,692,598	A	9/1987	Yoshida et al.
4,696,639	A	9/1987	Bohan, Jr.
4,734,658	A	3/1988	Bohan, Jr.
4,742,210	A	5/1988	Tsuchiyama et al.
4,752,210	A	6/1988	Trent
4,770,629	A	9/1988	Bohan, Jr.
4,778,378	A	10/1988	Dolnick et al.
4,834,284	A	5/1989	Vandermeyden
4,835,670	A	5/1989	Adams et al.
4,880,376	A	11/1989	Bartels et al.
4,984,981	A	1/1991	Pottebaum
4,986,468	A	1/1991	Deisinger
5,007,156	A	4/1991	Hurtgen
5,039,006	A	8/1991	Habegger
5,276,630	A	1/1994	Baldwin et al.
5,442,157	A	8/1995	Jackson
5,612,629	A	3/1997	Mullin et al.
5,622,200	A	4/1997	Schulze
5,652,525	A	7/1997	Mullin et al.
5,660,328	A	8/1997	Momber
5,797,358	A	8/1998	Brandt et al.
5,896,089	A	4/1999	Bowles
5,968,393	A	10/1999	Demaline
5,975,884	A	11/1999	Dugger
6,048,193	A	4/2000	Juntunen et al.
6,053,130	A	4/2000	Shellenberger
6,059,195	A	5/2000	Adams et al.
6,208,806	B1	3/2001	Langford
6,257,871	B1	7/2001	Weiss et al.
6,261,087	B1	7/2001	Bird et al.
6,271,505	B1	8/2001	Henderson
6,293,471	B1	9/2001	Stettin et al.
6,350,967	B1	2/2002	Scott
RE37,745	E	6/2002	Brandt et al.
6,560,409	B2	5/2003	Troost, IV
6,584,197	B1 *	6/2003	Boudreaux et al. 379/413.02
6,644,957	B2	11/2003	Weiss
6,684,821	B2	2/2004	Lannes et al.
6,701,874	B1	3/2004	Schultz et al.
6,838,847	B2	1/2005	Dragoi et al.
6,880,493	B2	4/2005	Clifford
6,934,862	B2	8/2005	Sharood et al.
6,955,301	B2	10/2005	Munsterhuis et al.
6,959,876	B2	11/2005	Chian et al.
7,205,737	B1	4/2007	Bilodeau
7,205,892	B2	4/2007	Luebke et al.
7,221,862	B1	5/2007	Miller et al.
7,252,502	B2	8/2007	Munsterhuis
7,275,533	B2	10/2007	Soeholm et al.
7,317,265	B2	1/2008	Chian et al.
7,712,677	B1	5/2010	Munsterhuis et al.
7,721,972	B2	5/2010	Bracken et al.
7,747,358	B2	6/2010	Troost et al.
7,804,047	B2	9/2010	Zak et al.
8,113,823	B2	2/2012	Guzorek
8,297,524	B2	10/2012	Kucera et al.
2005/0161518	A1 *	7/2005	Munsterhuis ..... 236/26 A
2005/0247304	A1	11/2005	Weiss
2006/0214015	A1	9/2006	Furukawa et al.
2007/0023333	A1	2/2007	Mouhebaty et al.
2010/0173252	A1	7/2010	Bracken et al.
2011/0048340	A1	3/2011	Anderson et al.
2011/0270544	A1	11/2011	Kucera et al.

OTHER PUBLICATIONS

Honeywell S8610U Universal Intermittent Pilot Module, Installation Instructions, 20 pages, Aug. 1996.

Johnson Controls Q135 Automatic Flue Damper System, 8 pages, 1998.

Lennox, "Network Control Panel (NCP), User's Manual," 18 pages, Nov. 1999.

Weil-McLain, Technical Services Bulletin No. SB201, 2 pages, Nov. 20, 2002.

* cited by examiner

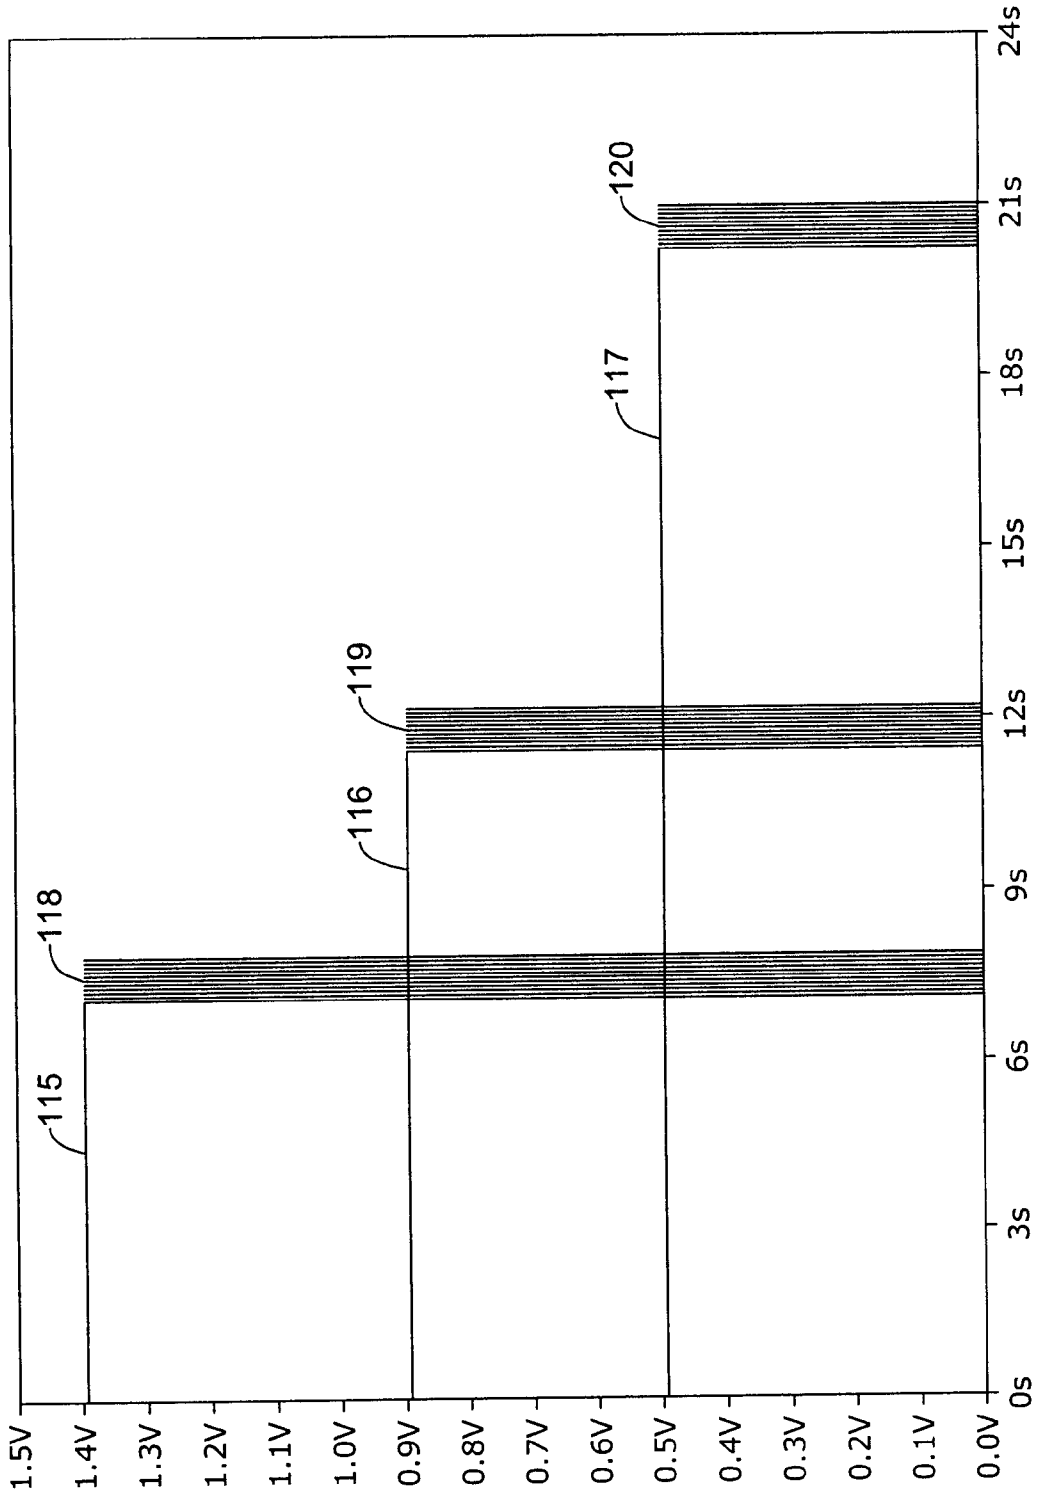
1.5V
1.4V
1.3V
1.2V
1.1V
1.0V
0.9V
0.8V
0.7V
0.6V
0.5V
0.4V
0.3V
0.2V
0.1V
0.0V
0s
3s
6s
9s
12s
15s
18s
21s
24s
115
118
116
119
117
120

Figure 1

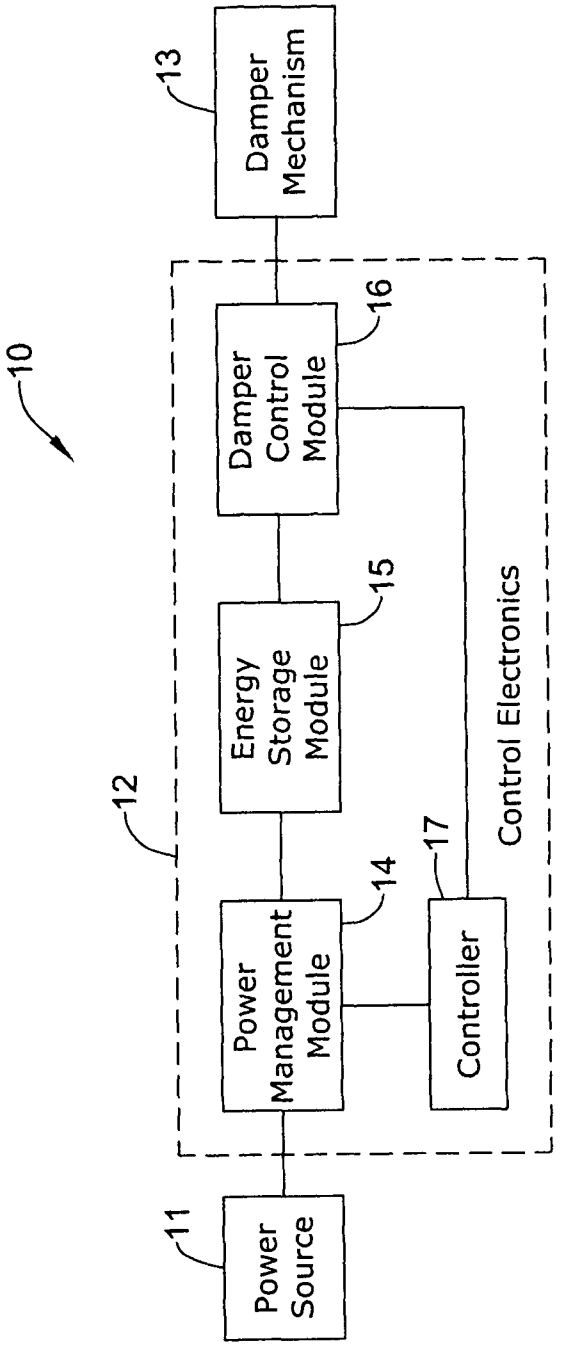
10
11
Power Source
12
Control Electronics
13
Damper Mechanism
14
Power Management Module
15
Energy Storage Module
16
Damper Control Module
17
Controller

Figure 2

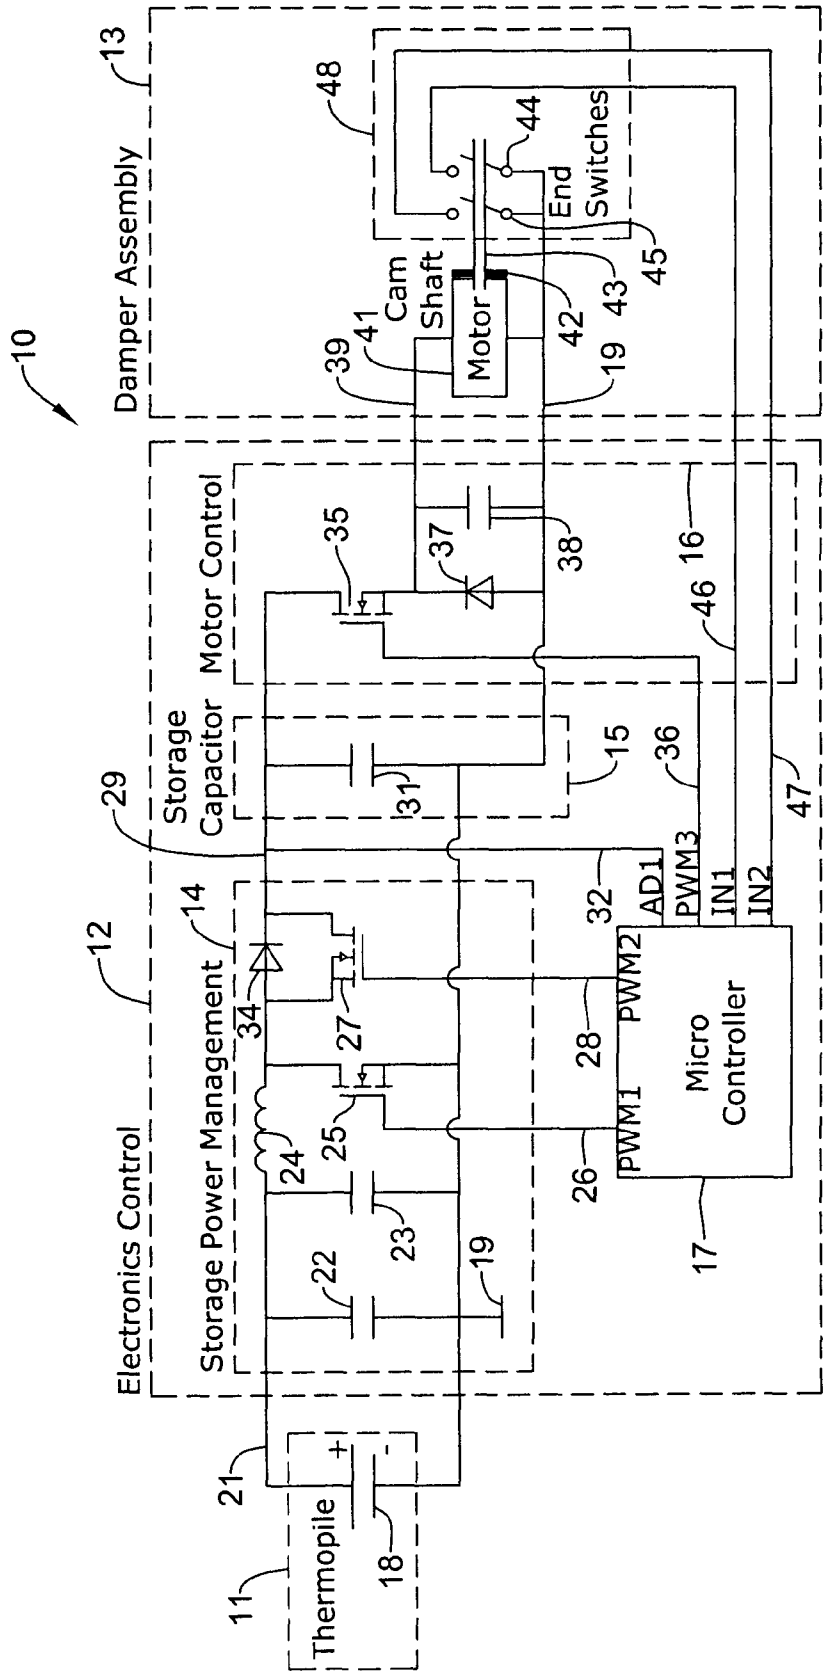
10
Damper Assembly
13
48
44
End Switches
45
43
42
Motor
Cam Shaft
41
39
19
Motor Control
35
37
38
16
46
Storage Capacitor
15
36
31
29
47
Electronics Control
12
Storage Power Management
14
34
27
32
AD1
PWM3
IN1
IN2
PWM2
28
PWM1
26
Micro Controller
17
24
25
22
23
19
21
11
Thermopile
+
-
18

Figure 3

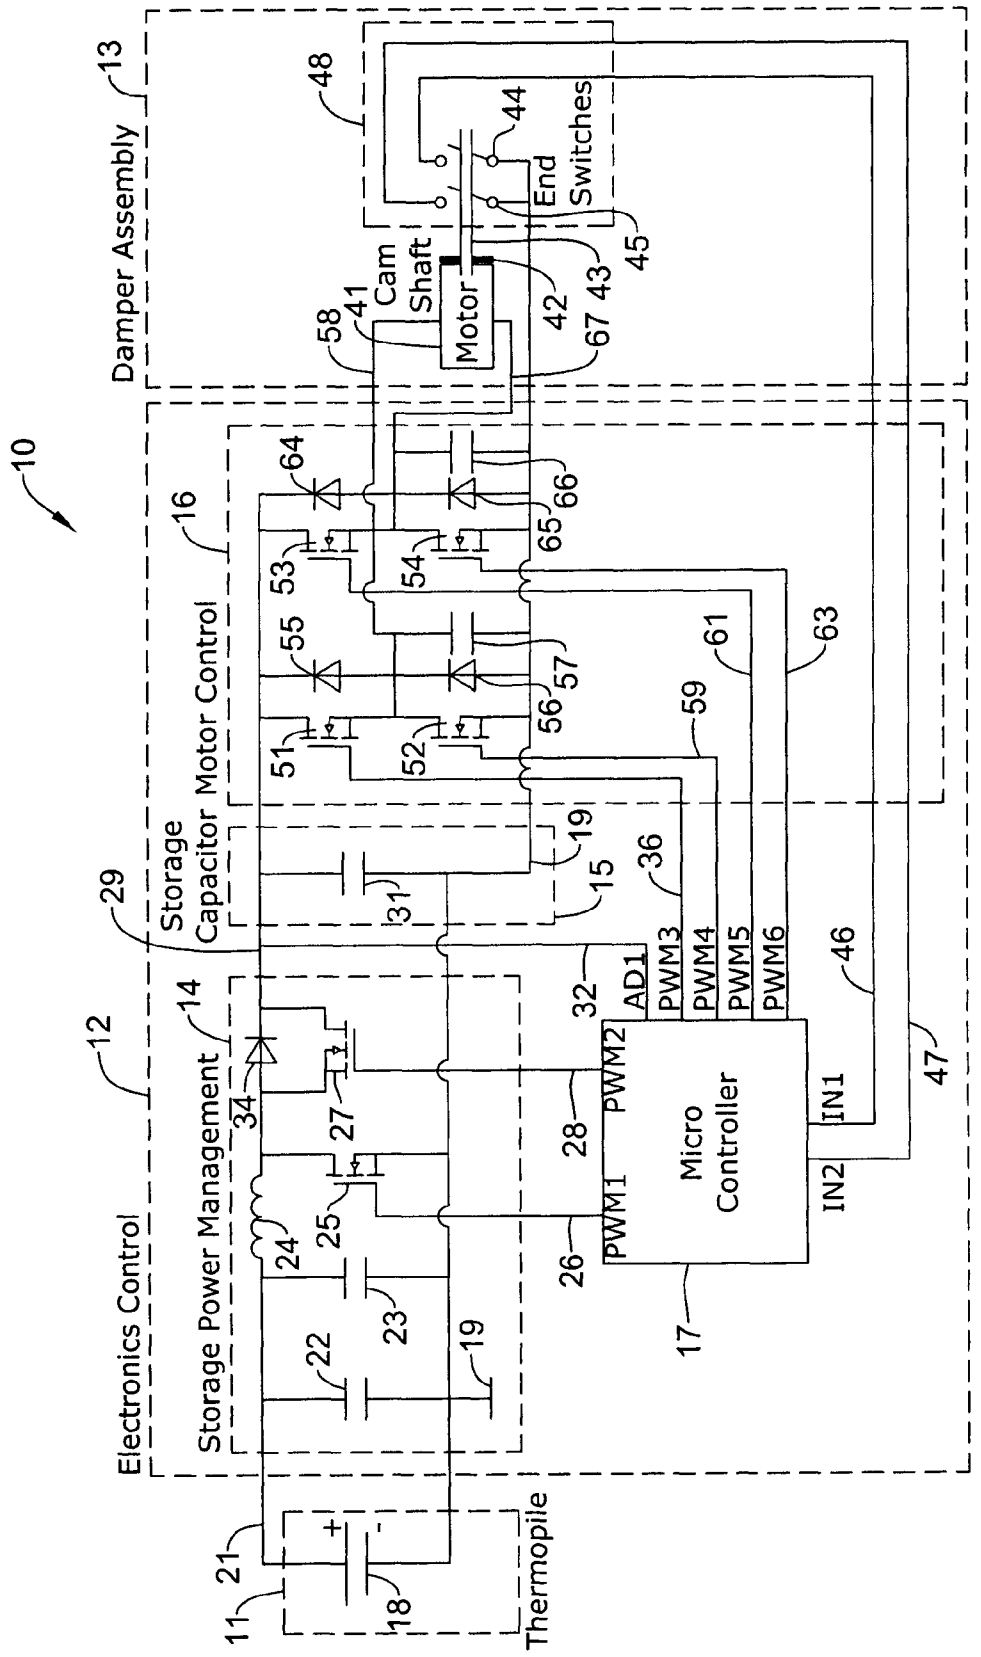
10
Damper Assembly
13
48
44
End Switches
45
Cam Shaft
41
Motor
42
43
67
58
64
66
65
16
Storage Capacitor Motor Control
53
54
55
57
56
51
52
59
61
63
19
15
36
29
31
12
14
Electronics Control
Storage Power Management
34
27
24
25
22
23
19
32
AD1
PWM3
PWM4
PWM5
PWM6
46
PWM2
28
PWM1
26
Micro Controller
17
IN1
IN2
47
21
11
18
Thermopile

Figure 4

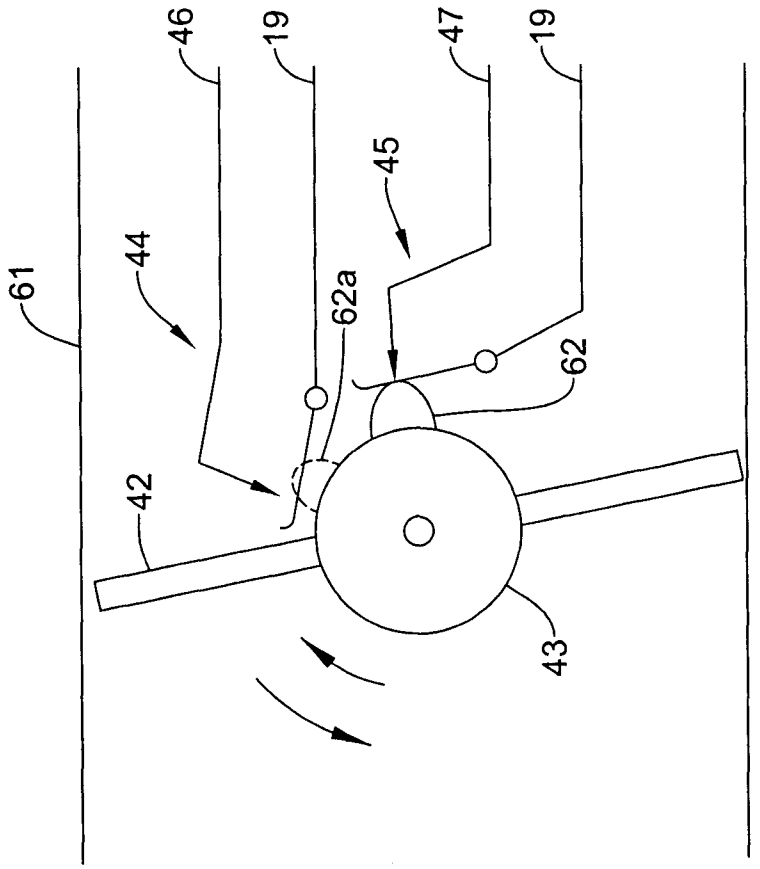

Figure 4A

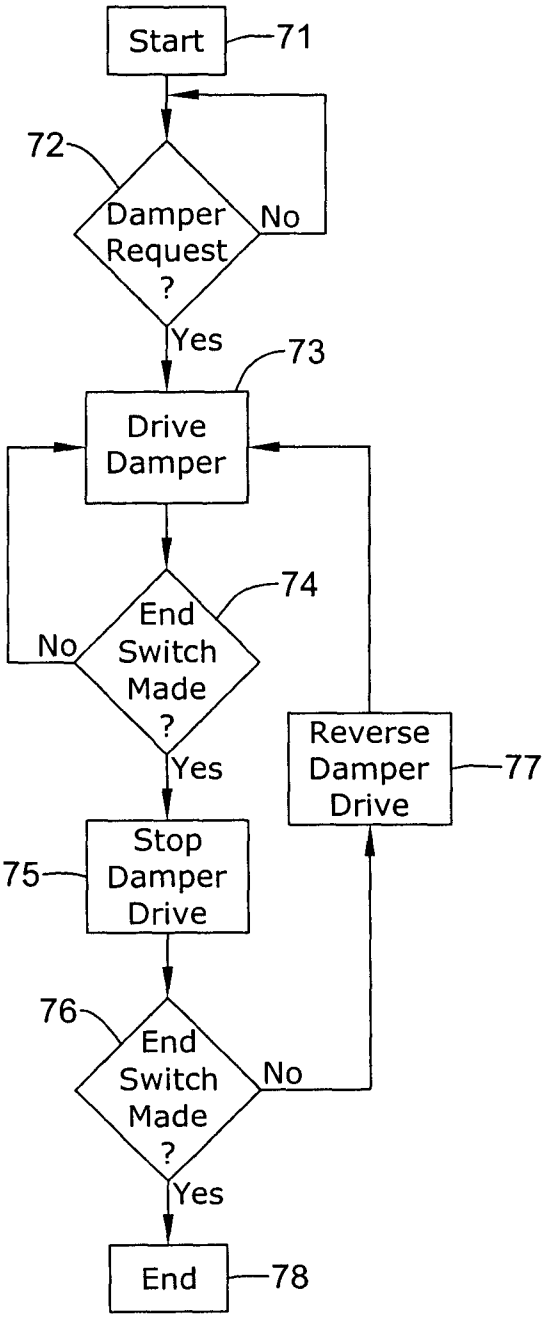
Start
71
72
Damper Request ?
No
Yes
73
Drive Damper
74
End Switch Made ?
No
Yes
Reverse Damper Drive
77
75
Stop Damper Drive
76
End Switch Made ?
No
Yes
End
78

Figure 5

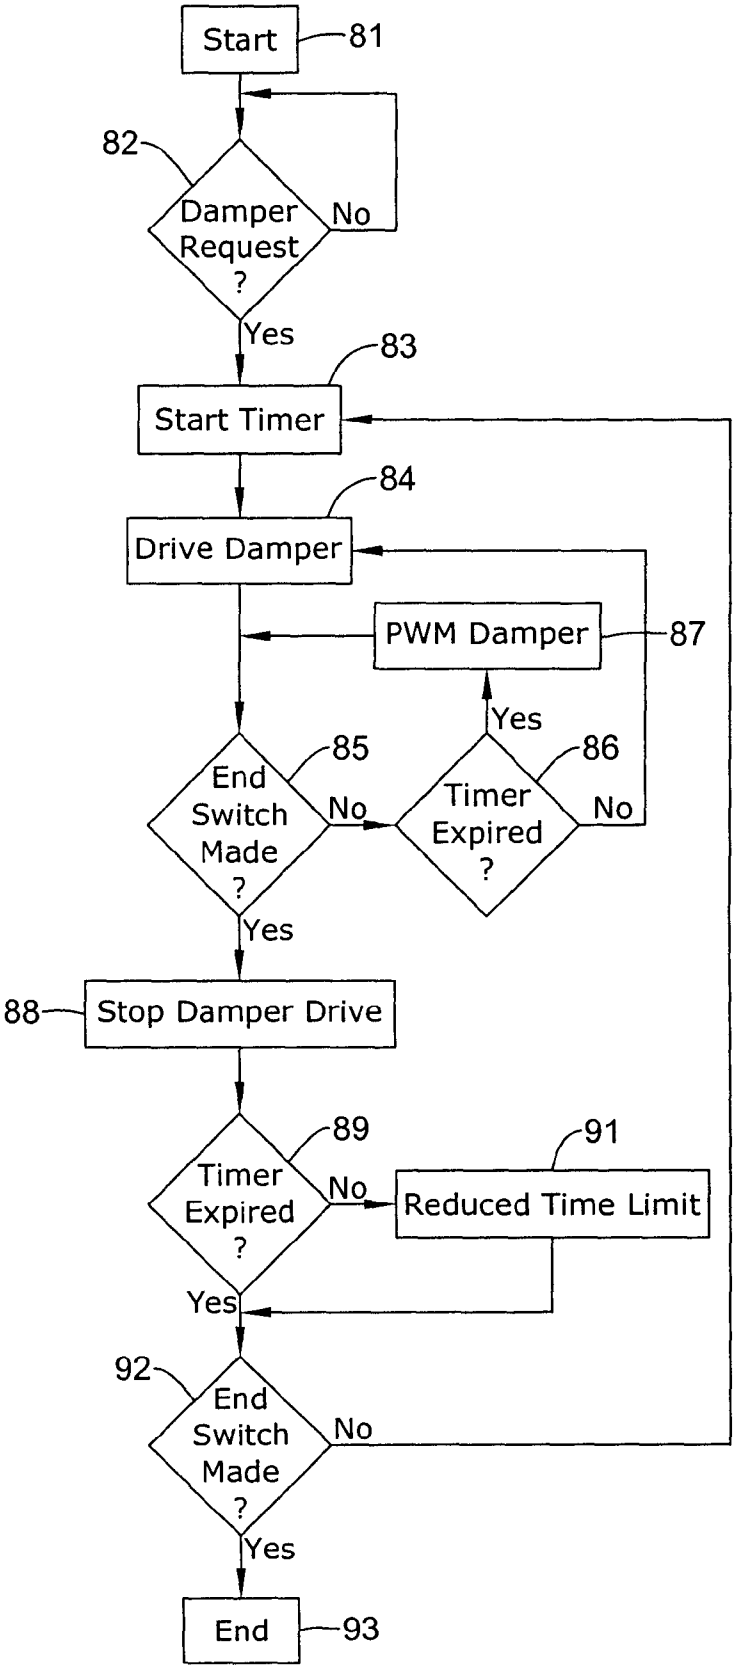
Start
81
82
Damper Request ?
No
Yes
83
Start Timer
84
Drive Damper
PWM Damper
87
Yes
85
End Switch Made ?
No
86
Timer Expired ?
No
Yes
88
Stop Damper Drive
89
Timer Expired ?
No
91
Reduced Time Limit
Yes
92
End Switch Made ?
No
Yes
End
93

Figure 6

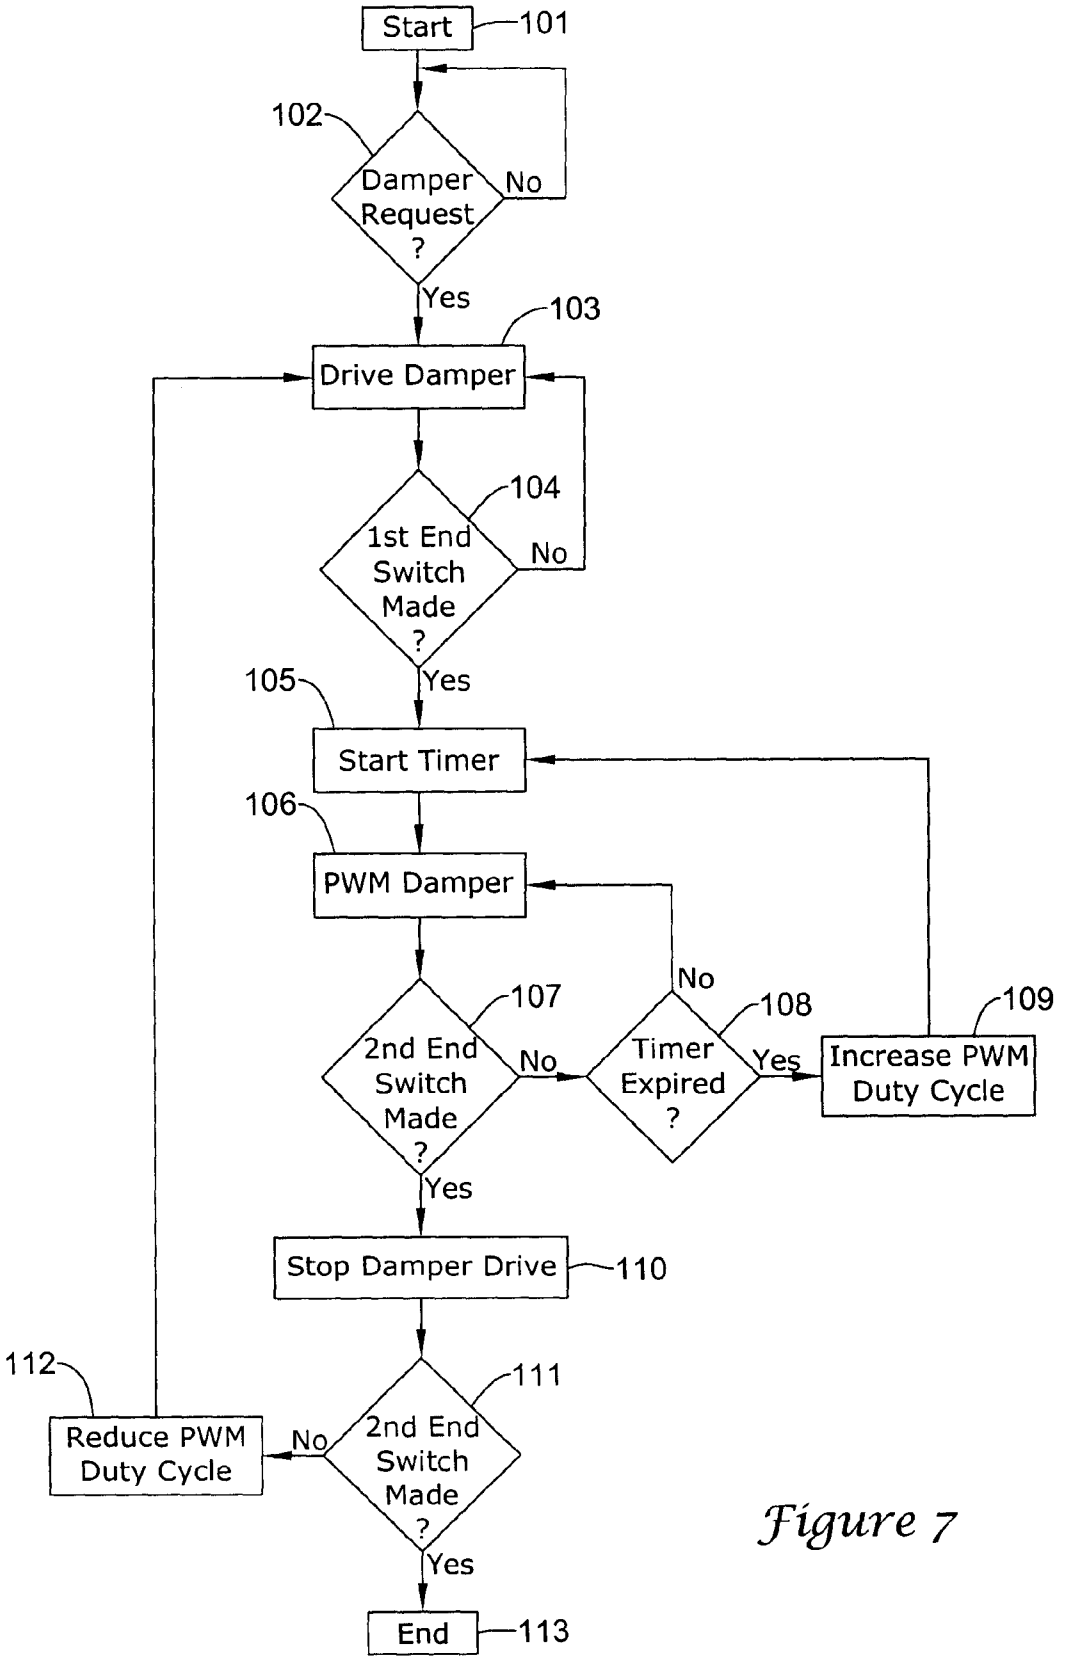
Start
101
102
Damper Request ?
No
Yes
103
Drive Damper
104
1st End Switch Made ?
No
Yes
105
Start Timer
106
PWM Damper
107
2nd End Switch Made ?
No
No
108
Timer Expired ?
Yes
109
Increase PWM Duty Cycle
Yes
Stop Damper Drive
110
112
Reduce PWM Duty Cycle
No
111
2nd End Switch Made ?
Yes
End
113

Figure 7

DAMPER CONTROL SYSTEM

This present application is a Continuation of U.S. patent application Ser. No. 12/553,795, filed Sep. 3, 2009, and entitled "A Damper Control System". U.S. patent application Ser. No. 12/553,795, filed Sep. 3, 2009, is hereby incorporated by reference.

BACKGROUND

The present invention pertains to devices for building control systems and particularly damper control devices.

SUMMARY

The present invention is a damper control system having energy efficient mechanisms. The invention may use a heat-to-electric power converter such as a thermopile. The invention may store the electric energy in a significantly large capacitor or other electrical storage device. The invention may monitor the position of a damper in a vent or the like and provide start and stop movements of the damper using minimal energy. One among several ways of controlling electrical energy to a damper motor or other electrical mover is to use variable pulse width modulated signals.

BRIEF DESCRIPTION OF THE DRAWING

FIG. **1** is a graph of a damper drive at various voltages;

FIG. **2** is a diagram showing basic components of a damper control system;

FIG. **3** and FIG. **4** provide circuit details of the components of the damper control system shown in FIG. **2**;

FIG. **4***a* is a diagram of damper in a vent including a camshaft with position switches;

FIG. **5** is a flow diagram of an operation of a damper control system;

FIG. **6** is a flow diagram of a more detailed operation of a damper control system; and

FIG. **7** is a flow diagram of another detailed operation of a damper control system.

DESCRIPTION

Various guidelines and energy efficiency ratings are effectively forcing water heater manufacturers to look at new ways to eliminate standby losses. Using a flame-powered control system in combination with a flue damper on a water heater is an important step in meeting such guidelines and ratings. However, a flame-powered damper motor control may suffer from the fact that the flame-generated supply voltage varies over a wider range. Too low of a voltage may not guarantee proper damper rotation while too large of a voltage may cause the damper to move past the desired position and continue to rotate the damper to the wrong position. To overcome this, a system may implement at least two thermopile devices in combination with a resistor parallel to the motor which consumes much power.

Also, a system may use end switches that are in series with the motor and act to remove current from the motor at a desired position. This arrangement may further increase the risk of moving the damper past the desired position—if the switches turn on again when the damper overshoots the desired position, the motor may be energized again and drive the damper to the wrong position. These non-ideal solutions

appear in place since no flame-powered components which can regulate the motor supply voltage seem to be commercially available.

The present system may solve the problem of the damper moving past the desired position and supply voltage regulation. The system may have application to fossil fuel burning appliances such as a water heater. The system may have the following features. The system may use flame-powered control electronics that are capable of controlling a damper motor supply voltage level. The control electronics may use just one thermopile (for cost reduction) in combination with a storage capacitor having a large capacitance, or other storage device such as a battery or the like, to provide motor supply voltage when needed. An example of a large capacitor rating may be about one farad, although the rating may be significant from a fraction of a farad to several farads, depending on a load that a moving damper presents electrically to the capacitor or equivalent storage device. The capacitor needs to be significant enough to provide power sufficient to drive the damper in accordance with the present system. However, if the power from the storage device is too low, then the driving of the damper may be stopped; for instance, that stopping would be equivalent to a PWM signal having a duty cycle equal to zero. In the meanwhile, the storage capacitor may be recharged. The capacitor or other storage device may be recharged via power management implemented in the control electronics.

A resistor parallel to the damper motor may be eliminated thus significantly reducing the amount of power needed to operate the damper, and enabling the use of just one thermopile combined with a large capacitor or other storage device. The thermopile or other heat-to-electric power converter may be positioned near a normal pilot light or flame used for igniting a flame for an appliance. The thermopile or other heat-to-electric power converter may instead be positioned near much smaller than normal pilot flame or light. Such structure may result in lower costs compared to a system using several thermopiles, a normal pilot flame or a heating flame. In lieu of a thermopile or other heat-to-electric power converter, a solar cell and a source of light may be used as a source of power. These sources and/or other power sources may be used in a combination.

With the present system, moving past the desired position may be avoided by controlling the motor power supply voltage as the damper approaches the desired position. One way of control may be a use of variable pulse-width modulation (PWM), such as reducing the duty cycle to slow it down or vice versa. Another way of control would be to have a transistor connected in series which could be controlled to limit the current to the motor driving the damper to slow it down, stop it, start it or speed it up. Moving past the desired position may be further reduced or avoided by connecting an end switch or switches in the damper assembly such that the switch or switches are not in series with the motor power supply. End switches may provide information about the damper position. The end switch or switches may maintain contact over a range of angles between a desired open or closed damper position. This is to ensure that the control electronics can detect when the desired position is being approached, and operate to control the motor supply voltage or current in order to decelerate the rotation such that the damper reaches and stops at the desired position. An approaching position may be detected with a timer which indicates the time for the damper to reach a certain position. If the time is deemed too short or too long as indicated by the time the damper reaches the desired position according to the switch or switches, then the timer may be re-adjusted (e.g., via feedback) to more accurately indicate the time of the

desired position at the next event of damper movement. Such adjustment may be continuous. The timer may instead be regarded as a time period or limit.

The voltage supply may be connected/disconnected, or adjusted, by a switching device (e.g., transistor) in the control electronics. Since application safety is taken care of by the control electronics, a redundant end switch in the damper assembly may be eliminated, further reducing costs. In existing systems, the redundant end switch is connected in series with another end switch and the gas main valve and is implemented to make the system robust to single failures.

A sensor for indicating a position of the damper may be used in lieu of the switch or switches, e.g., switches **44** and **45** in FIGS. **3**, **4** and **4***a*. A potentiometer, Hall sensor, light source and detector, and/or other devices may be used as a position indicator for a damper.

In addition, the control electronics may be capable of sensing water temperature and controlling gas valves. This may eliminate the need in some systems in that the temperature sensor has to provide a pair of contacts. Instead, a combination of a low cost accurate sensor (e.g., NTC sensor), an electronically sensed temperature set point, and a safety algorithm implemented in the control electronics, may provide accuracy and safety greater than other systems. Although some of these items might not relate directly to damper control, they may constitute an important improvement over other systems.

The present system may have control electronics which are flame-powered and include a microprocessor capable of managing power, reading a state of the damper end switches, and controlling electronic switches that connect power to the damper motor. The system may be powered by means of a single thermopile. When flame power is available, a large storage device may be charged. This device may then provide power for the damper at the end of heat cycle to drive it closed, preserve the remaining charge during standby (flame off), and again provide power to the damper at the beginning of the next heat cycle to drive it open. At the very first manual system start-up, a pilot flame may be used to charge the storage device via the power converter, for example in a case with the damper closed, prior to an opening the damper and igniting the main flame. The main flame and/or the pilot light, having a medium or small size, may be used as a source of heat for a heat-to-electric power converter. For other examples, a solar cell or other kind of light-to-electric power converter may be used along with a source of light such as ambient light, a bulb, or a flame. These different kinds of power sources may be used separately or in combination. The control electronics or controller may have inputs which include the energy storage module status, damper position signals, an appliance request for heat, and other signals useful for operation of the damper control system.

The present damper assembly may appear similar to other assemblies; however, the present assembly may have significant differences in that it has no parallel resistor, the end switches are not in series with the motor supply, and the redundant end switch is not present.

The damper may be driven with unregulated DC voltage. The higher the voltage, the faster the motor spins. If the supply voltage is too low, the motor will not be driven (or will stop being driven) until the voltage is increased above a specified level. For a given voltage, using adjustable pulse width modulation, the motor and driven damper may be slowed by reducing the duty cycle or increased in speed by enlarging the duty cycle.

When the damper is approaching the open or closed positions, voltage regulation to the motor may begin in order to control the speed and allow the motor to slowly coast the damper into place or destined position. FIG. **1** is a graph of a damper drive at various voltages. The graph shows the motor drive for three different supply voltages, 1.4V, 0.9V, and 0.5V at levels **115**, **116** and **117**, respectively. Since the higher voltage drive will get to the end position faster, the PWM begins sooner. In the present example, the coasting voltage may be set to 0.3V for each of the supply voltages; so that the 1.4V supply PWM **118** is at 21%, the 0.9V supply PMW **119** is at 33%, and the 0.5V supply PMW **120** is at 60%. One may note that FIG. **1** is for illustrative purposes in that the specific voltages and timing parameters used are just examples.

A damper approaching an end position may be detected by a switch (in addition to the end switch) placed before the end position or by a shaped switch-actuating cam such that the switch remains actuated over a specified range of damper rotation. The end position may additionally be determined by timing the duration of rotation. Based on previous operations, the time to reach the end position may be estimated and the PWM can start at a pre-determined time.

Another way to stop the motor and damper at the correct position may include an attempt to stop the motor the instant the end switch is closed. If the switch opens again, it may be assumed that the motor spun past the desired stop point and that the damper control can reverse motor rotation by changing the drive voltage (for example, by reversing the voltage polarity to a DC motor or reversing the step direction to a stepper motor). If the damper control is incapable of reversing or does not reverse the damper motor, then the motor may drive the damper nearly all the way around again in the same direction so as to arrive close to the desired stop point. The motor for moving the damper may be instead an electric solenoid or other electric mover.

FIG. **2** is a diagram showing basic components of a damper control system **10**. A source **11** may provide power to components of control electronics **12**. An output of electronics **12** may be connected to a damper assembly **13** to control a position of a damper. Control electronics **12** has a power management module **14** having an input connected to the power source **11** and an output connected to an input of an energy storage module **15**. Electronics **12** may also have a damper control module **16** with an input connected to the energy storage module **15** and an output connected to the damper assembly **13**. There may also be a controller **17** connected to the power management module **14** and the damper control module **16**.

FIG. **3** and FIG. **4** provide circuit details of the components of damper control system **10** shown in FIG. **2**. System **10** of FIG. **3** has a single direction drive for the damper control module **16**. FIG. **4** has a reversible direction drive for module **16**. The damper control module **16** may also be referred to as a motor control or motor control drive.

Power source **11** may have a thermopile **18** which converts thermal energy into electrical energy. The negative terminal of the thermopile **18** may be connected to a reference voltage or ground terminal **19** of system **10**. The power management module **14** may have a capacitor **22** with one terminal connected to terminal **19** and another terminal connected to the positive terminal **21** of thermopile **18**. Capacitor **22** may have a value of about 220 microfarads. Another capacitor **23** may be connected in parallel with capacitor **22**. Capacitor **23** may have a value of about 100 nanofarads. An inductor **24** may have one end connected to terminal **21** and the other end connected to a drain of a field effect transistor (FET) **25**. Inductor **24** may have a value of about 220 microhenries. FET **25** may have a source connected to terminal **19** and a gate connected to a PWM1 output **26** of controller **17**. A source of

a FET **27** may be connected to the drain of FET **25**. A gate of FET **27** may be connected to a PWM2 output **28** of controller **17**.

A drain of FET **27** may be connected to a terminal **29** which is connected to one end of a capacitor **31** of the energy storage module **15**. The other end of capacitor **31** may be connected to reference terminal **19**. Terminal **29** may also be connected to an AD1 input **32** of controller **17**. A Schottky diode **34** may have an anode connected to the source of FET **27** and have a cathode connected to the drain of FET **27**. Diode **34** may have a model number MBR0530TX. FET's **25** and **27** may have a model number MGSF2N02ELT1.

Capacitor **31** of energy storage module **15** may be used for storing energy for system **10**. The value of capacitor **31** may be about one farad. Terminal **29** from capacitor **31** may be connected to an input of damper control module **16**, which may be regarded as a motor control. The input of module **16** may be a drain of a FET **35**. A gate of FET **35** may be connected to a PWM3 output **36** of controller **17**. A source of FET **35** may be connected to a cathode of a diode **37**. An anode of diode **37** may be connected to reference terminal **19**. A capacitor **38** may be connected in parallel with diode **37**. Diode **37** may have a model number S1G. Capacitor **38** may have a value of about 100 nanofarads. FET **35** may have the same model number as FET **27**. FET **35**, diode **37** and capacitor **38** may constitute the damper control module **16** having a single direction drive motor control for damper assembly **13**.

The output of module **16** at terminals **19** and **39** may go to a motor **41** of damper assembly **13**. Motor **41** may drive a damper **42** having a camshaft **43**. End switches **44** and **45** may be situated proximate to the camshaft **43** such that one switch **44** operates when the camshaft **43** is in one position and the other switch **45** operates when the camshaft **43** is in another position. The operation of switches **44** and **45** relative to camshaft **43** is to indicate to the controller **17** a position of the damper **42** as it is moved by motor **41**. Switch **44** has one terminal connected to reference terminal **19** and the other terminal connected to an IN1 input **46** of controller **17**. Switch **45** may have one terminal connected to reference terminal **19** and the other terminal connected to an IN2 input **47** of controller **17**. The end switches **44** and **45** may be regarded as a switch mechanism **48**. Devices, other than a switch or switches, may be used for damper position detection. Controller **17** may be a microcontroller of one kind or another.

Damper control system **10** in FIG. **4** is similar to system **10** in FIG. **3** except for damper control module **16** for motor control is different. Terminal **29** may be connected from capacitor **31** to a drain of a FET **51**. Reference terminal **19** may be connected from capacitor **31** to a source of a FET **52**. A gate of FET **51** may be connected to the PWM3 output **36** of controller **17**. A source of FET **51** may be connected to a drain of a FET **52**, an anode of a diode **55**, a cathode of a diode **56**, a first end of a capacitor **57** and terminal **58** to motor **41**. A gate of FET **52** may be connected to a PWM4 output **59** of controller **17**. A gate of FET **53** may be connected to a PWM5 output of controller **17**. A gate of FET **54** may be connected to a PWM6 output of controller **17**. Terminal **29** may be also connected to a cathode of diode **55**, a drain of FET **53** and a cathode of a diode **64**. An anode of diode **56**, a second end of capacitor **57**, a source of transistor **54**, an anode of diode **65**, and a second end of a capacitor **66** may be connected to terminal **19**. A source of FET **53**, a drain of FET **54**, an anode of diode **64** and a first end of capacitor **66** may be connected to a terminal **67** to motor **41**. FET's **51**, **52**, **53** and **54** may have a model number MGSF2N02ELT1. Diodes **55**, **56**, **64** and **65** may have a model number S1G. Capacitors **57** and **66** have a value of about 100 nanofarads. Damper assembly **13** of FIG. **4** may be like damper assembly **13** of FIG. **3**. Power source **11** may contain a thermopile **18** in FIG. **4**. Power management module **14** of system **10** in FIG. **4** may be like module **14** of system **10** in FIG. **3**.

FIG. **4***a* is a diagram of damper **42** for a vent **61**. The damper may have camshaft **43** attached for indicating the position of the damper. In this instance, as driven by motor **41** (not shown in FIG. **4***a*) attached to shaft **43**, the damper may rotate counterclockwise to open and clockwise to close. Switch **45** may close due to a cam lobe on the camshaft when damper **42** approaches closure in a clockwise movement. Switch **46** may close when the damper moves in a counterclockwise direction into an open position as indicated by a new position **62***a* of cam lobe **62**. Switch **45** may open upon a movement of lobe **62** away from the switch. This is merely one arrangement of position indication of the damper, particularly with one or more switches.

FIG. **5** is a flow diagram of an operation of a damper control system **10**. The operation may begin at start **71** which leads to a symbol **72** where a question of whether there is a damper request. If not, then a return to the beginning of symbol **72** may occur. If the answer is yes, then a drive damper may occur at block **73** and the operation continue onto symbol **74** where a question of whether an end switch was made. The end switch may be activated by a cam connected to the damper. The making of the end switch may indicate an opening of the damper. If the question to symbol **74** is no, the there is a return to the drive damper block **73**. The question of symbol **74** may be again answered. When a yes occurs, then the damper is stopped at block **75**. Then at symbol **76**, a question of whether an end switch was made is asked. If the answer to the question is no, it may mean that the end switch on the cam connected to damper was overshot. Then the damper drive may be reversed at block **77**. The approach from block **73** through symbol **76** may repeated. When an answer to the question in symbol **76** is yes, then the operation may stop at the end block **78**.

FIG. **6** is a flow diagram of a more detailed operation of a damper control system **10** which may begin at a start block **81** and proceed to a symbol **82** where a question concerning a damper request is asked. If an answer is no, then a return to the entry of symbol **82** may be made. When the answer is yes to the question in symbol **82**, then the operation may proceed to a block **83** where a timer is started and the damper is driven at block **84**. At symbol **85**, a question of whether an end switch was made may be asked. If an answer is no, then another question asking whether the timer was expired may be asked at symbol **86**. If an answer to the question in symbol **86** is no, then the operation may return to the drive damper block **84**. If the answer is yes to the question in symbol **86**, then the operation may go to a PWM damper block **87** after which the operation goes to the question asked in symbol **85**. If the answer to the question in symbol **85** is yes, then the operation may proceed to stop the damper drive at block **88**. After stopping the damper drive, then at symbol **89**, a question whether the timer was expired may be asked. If an answer is no, then the time limit may be reduced at block **91** because the damper reached the end switch position before the PWM began. Reducing the time limit will cause the PWM to start sooner on the next cycle. If the answer is yes, then the operation may go to symbol **92** for a question of whether an end switch is still made. If an answer is no, then the operation may return to block **83** where the damper driving procedure is started again. In this case, it is assumed the damper spun past the end switch. Since the damper in this example moves in one direction only, the damper must be driven completely

around again. If an answer to the question in symbol **92** is yes, then the operation may end at block **93**.

FIG. **7** is a flow diagram of another detailed operation of a damper control system **10** which may begin at start block **101** and proceed to a symbol **102** where a question about a damper request is asked. If there is not a damper request, then a return to the entry of symbol **102** may be made. If the answer is yes to the question in symbol **102**, then the operation may proceed to a block **103** where a damper is driven. The operation may proceed further on to a symbol **104** where a question of whether a first end switch was made or not. If an answer is no, then the operation may return to block **103** to drive the damper. If the answer is yes, then the operation may start a timer at block **105**. Then the operation may proceed to provide PWM to the damper drive at block **106**. From block **106**, the operation may proceed to symbol **107** which asks the question whether the second end switch was made. If an answer is no, then operation may proceed to symbol **108** to ask a question whether the timer had expired. If an answer is no, then the operation may proceed to block **106** to continue to provide PWM to the damper drive. If the answer is yes to the question in symbol **108**, then the operation may proceed to block **109** to increase a PWM duty cycle and then go to block **105** to start the timer. The timer may track the expected time it takes to slow the damper down and coast to the end switch position. When the timer expires, it is assumed the damper is moving too slowly or even has stopped. The PWM may be increased to speed up the damper slightly so it reaches the end switch sooner. If the answer to the question at symbol **107** is yes, then the operation may proceed to stop the damper drive at block **110** and go to a symbol **111** where a question whether the second end switch was made. If an answer to the question is no, then the PWM duty cycle may be reduced at block **112** and the operation may return to block **103** to restart the damper drive procedure. If the answer to the question in symbol **111** is yes, then the operation may end at block **113**.

In the present specification, some of the matter may be of a hypothetical or prophetic nature although stated in another manner or tense.

Although the invention has been described with respect to at least one illustrative example, many variations and modifications will become apparent to those skilled in the art upon reading the present specification. It is therefore the intention that the appended claims be interpreted as broadly as possible in view of the prior art to include all such variations and modifications.

What is claimed is:

1. A damper control system for a fuel burning appliance, comprising:
- a power source;
- a power management component connected to the power source;
- an energy storage component connected to the power management component;
- a damper control component connected to the energy storage component; and
- a controller connected to the power management component and the damper control component; and
- wherein:
- the power source comprises a heat-to-electric power converter or a light-to-electric power converter; and
- the energy storage component is for storing electric energy from the power source.

2. The system of claim **1**, a source of heat or light for the power source comprises one or more items comprising a pilot light for igniting a flame, a flame, ambient light or a bulb.

3. The system of claim **1**, wherein:
- the energy storage component comprises one or more items comprising a capacitor or a battery; and
- the energy storage component is capable of storing electric energy sufficient to operate a damper assembly.

4. The system of claim **1**, wherein:
- the controller is for providing a control signal to the damper control component, based on inputs comprising energy storage component status, a damper position signal, or an appliance need for heat; and
- the damper control component is for outputting a damper drive signal in accordance with the control signal.

5. The system of claim **4**, wherein the damper control component is connected to a damper assembly.

6. The system of claim **5**, wherein the damper assembly comprises one or more damper position detectors for providing the damper position signal.

7. The system of claim **5**, wherein the damper assembly comprises:
- an electrical mover connected to the damper control component;
- a damper connected to the electrical mover; and
- a position indicating mechanism proximate to the damper; and
- wherein the position indicating mechanism is for indicating one or more damper positions and for providing a damper position signal indicative of the one or more damper positions as an input to the controller.

8. The system of claim **7**, wherein the controller is for controlling power via the damper control component as a damper drive signal to the electrical mover to control a position of the damper.

9. The system of claim **8**, wherein the damper drive signal has a polarity which is reversible by the damper control component as directed by the controller in accordance with damper position signals from the position indicating mechanism.

10. The system of claim **7**, wherein:
- the energy storage component is for further providing power to the damper control component;
- a pulse width modulation component of the control signal is generated by the controller in accordance with a damper position signal from the position indicating mechanism; and
- the pulse width modulation component has a duty cycle which is adjustable.

11. The system of claim **10**, wherein:
- the pulse width modulation component is further generated by the controller more in accordance with a signal from the energy storage component;
- the damper control component is for outputting a damper drive signal to the electric mover; and
- the damper drive signal comprises the pulse width modulation component.

12. The system of claim **11**, wherein the pulse width modulation component is adjusted as the damper approaches a destination position.

13. The system of claim **4**, wherein:
- the control signal comprises a pulse width modulated component as needed; and
- the pulse width modulation component has a duty cycle which is adjustable.

14. The system of claim **1**, wherein:
- the heat-to-electric power converter comprises one or more thermopiles; and
- the light-to-electric power converter comprises one or more solar cells.

15. The system of claim 1, wherein the power management component is for managing electric power going from the power source to the energy storage component.

16. A damper control device comprising:

a power converter;

an electric energy storage component for receiving power from the power converter;

a damper control component for controlling a flow through a flue of a fuel burning appliance; and

a power management component for controlling the power from the power converter to the electric energy storage component and for controlling power from electric energy storage component or the power converter to the damper control component.

17. The device of claim 16, wherein the fuel burning appliance is a water heater.

18. The device of claim 16, wherein the energy storage component is capable of storing electric energy sufficient to operate the damper control component.

19. The device of claim 18, wherein:

the damper control component controls the flow through the flue with drive signals to a damper assembly; and

the damper assembly comprises:

a damper;

a electrical mover connected to the damper; and

a sensor for indicating a position of the damper.

20. The device of claim 19, wherein:

controlling a damper comprises:

a request to the damper control component to move the damper to a particular position; and

the damper control component providing drive signals to the damper assembly to move the damper;

if the damper has not approached the particular position according to the sensor, then the damper control component continues to provide drive signals to the damper assembly;

if the damper has approached the particular position according to the sensor, then the damper control component provides cease signals to stop movement of the damper; and

if the damper goes beyond the particular position according to the sensor, then the damper control component provides reverse drive signals to move the damper in an opposite direction or provides drive signals to move the damper in the same direction to approach the particular position.

21. A control system for a damper comprising:

a power converter;

a power management component connected to the power converter;

an energy storage component connected to the power management component;

a damper control component connected to the energy storage component; and

a controller connected to the power management component and the damper control component; and

wherein:

the energy storage component comprises one or more items comprising a capacitor or a battery;

the power converter provides electrical power converted from heat or light to charge the energy storage component; and

the energy storage component has sufficient capacity to store energy to operate a damper assembly.

22. The system of claim 21, wherein:

the damper control component is for providing a control signal to the damper assembly to control a position of a damper of the assembly;

a pulse width modulation component of the control signal is generated by the controller for the damper control component in accordance with a damper position signal from a position indicating mechanism proximate to a damper; and

the pulse width modulation component has a duty cycle which is adjustable.

23. The system of claim 21, wherein a source of heat or light for the power converter comprises one or more items comprising a pilot light for igniting a flame, a flame, ambient light or a bulb.

* * * * *